


Prevent Basement Flooding...

Quality & Performance. Ask for it by name.

SP2500 Primary Sump Pump

SP2500 Primary Sump Pump

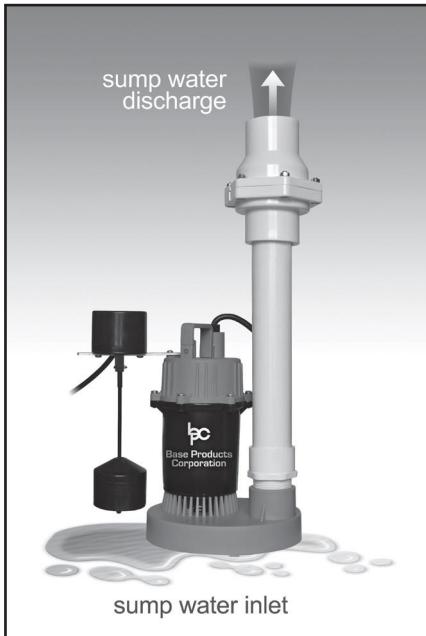

MODEL SP2500

Features/Advantages

- High Volume SP2500 pump, 1/4 HP. Single Phase, 115V/60HZ, 3450RPM
- Cast Aluminum Housing construction with Stainless Steel fasteners and clamps
- Thermoplastic base & impeller
- Oil filled motor for maximum heat dissipation
- PSC motor with automatic thermal overload protection
- 1 1/2" threaded discharge capable of handling up to 1/8" solids
- Complete unit is light weight, portable and compact
- Heavy duty SJTW Power cord: 10 feet long, Heavy duty with 3-prong plug
- Adjustable vertical float switch with 10 foot cord and piggy back plug
- High water alarm, 9VDC battery operated, 85 dB alarm, relay outputs for security systems
- Agency listings: CSA Approved
- Two year warranty

Product Specification

Service Requirements:

- 1/4 HP, 115V, 60Hz, single phase, 3450 RPM, 4.7 amps
- Minimum circuitbreaker, 15 amps

Pumping Rates:

- 3,000 GPH @ 10' discharge
- 3,200 GPH @ 5' discharge
- Maximum head: to 26 feet

Dimensions:

- Pumping Range: 8"
- Minimum basin diameter: 12"
- Size: 8" diameter base x 12" high
- Pump weight: 11 lbs.

Model # SP2500 Primary Sump Pump

How It Works

The SP2500 is a primary sump pump systems utilizes a high capacity, commercial quality pump complete with an adjustable compact level switch. The package includes most items for a standard installation into typical sump pits. Included is a 9VDC high water alarm with relay output, suitable for connection to a home security system.

Two Year Warranty

Materials Included

- SP2500 Sump Pump
- 1-1/2" Pipe x 12" lg. and fitting
- Check Valve, 1-1/2" Size
- Vertical Float Switch, piggyback plug
- High Water Alarm, 9V DC

Base Products Corporation

Flood Prevention Products
265 Mayville Ave, Buffalo, NY 14217
Phone: 716-876-5206 Fax: 716-876-5211
Toll Free: 800-554-1426
www.basepump.com